


PROFIX MAX

MOST POWERFUL AND MODULAR STRUT

The ProFix Max is an integrated and easy to use shoring device with a powerful 16.5 US tons capacity at a safety factor 4:1. It can be operated manually, pneumatically and even hydraulic (in combination with the ram). With just a few struts and attachments unlimited applications are available. Use it for structural, trench, stabilization and lift support. The ProFix Max is a powerful and versatile necessity for rescue teams.

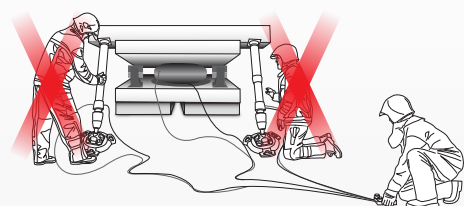

The automatic locking system of the ProFix Max makes shoring and stabilizing loads easy as breathing. Add the pneumatic functionalities of the ProFix Max and every rescuer can operate the struts safely out of range. Working in the danger zone, right underneath the load, is no longer needed.




ProFix Max is telescopic; it provides automatic mechanical locking in any position for ease of use and operation

- 16.5 US tons capacity at safety factor 4:1
- Structural, trench, stabilization and lift support
- A few struts + extensions = unlimited applications
- Pneumatic and mechanical operation



By adding the Multi-Swivel and a PowerPlate, your ProFix Max is provided with extra grip and new possibilities to use chains, ratchet straps or earth nails to fix it firmly.

Height indicators assure the maximum height is not exceeded during a lifting procedure.

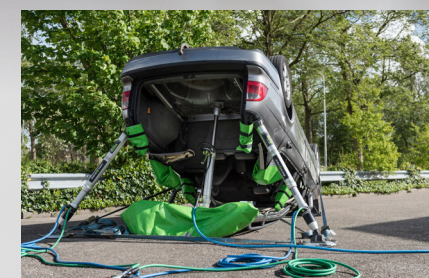

The ProFix Max provides 11 US ton lifting capacity by integration of the ram.

STABILIZATION EQUIPMENT OVERVIEW

PROFIX MAX
TOTAL RESCUE SOLUTION

The automatic locking system of the ProFix Max makes shoring and stabilizing loads easy as breathing. Add the pneumatic functionalities of the ProFix Max and every rescuer can operate the struts safely out of range.



PROFIX MAX	PXM 470	PXM 600	PXM880	PXM1400	PXM2300
Max. operating pressure	174 PSI	174 PSI	174 PSI	174 PSI	174 PSI
Weight	16.6 lbs	19.4 lbs	25.8 lbs	37.5 lbs	57 lbs
Span	18.5" - 26.1"	23.6" - 36.0"	34.6" - 56.3"	55.1" - 94.0"	90.6" - 159.1"
Stroke cylinder + collar	5.7" + 1.9"	10.4" + 1.9"	19.7" + 1.9"	36.9" + 1.9"	66.7" + 1.9"
Total length retracted	23"	28.2"	39.2"	59.7"	95.1"
Working load limit	147kN / 16.5 US ton	147kN / 16.5 US ton	147kN / 16.5 US ton	147kN / 16.5 US ton	88.3kN / 9.9 US ton



EXTENSIONS	EX150	EX300	EX600	EX900	EX1200	EX1500
Weight	3.9 lbs	5.5 lbs	9 lbs	12.2 lbs	15.9 lbs	19.3 lbs
Length	6"	12"	23.7"	35.6"	47.4"	59.2"
Working load limit ¹	147 kN / 16.5 US ton					

¹ safety factor 4:1



TRIPOD



























BIPOD



MONOPOD

Total load capacity	11 US ton	4.4 US ton	0.9 US ton
Hoisting load capacity (center)	2.2 US ton	N/A	N/A
Total hoisting load capacity	4.9 US ton	4.4 US ton	0.9 US ton
EN 795-TYPE B	Compliant		
EN 16415-TYPE B	Compliant		

STABILIZATION EQUIPMENT ACCESSORIES

 MULTISWIVEL w/ and w/o ringhandle	 RHINO	 EDGE SUPPORT	 BEAM SUPPORT	 CROWN	 FIXED BASE	 RAM ADAPTER	 MULTI CONNECTOR
 COLUMN GANTRY	 MULTI TOOL	 REMOTE CONTROLLER	 NT REGULATOR 200/300 BAR	 RATCHET STRAP WITH HOOK	 HOSE 32.8FT (X2)	 EARTH NAIL	 RAKER RAIL
 RAKER RAIL CONNECTOR	 PROFIX JUNCTION	 RAKER RAIL HINGE	 NAILING BLOCK	 POWERPLATE	 POWERPLATE PLUG	 CONNECTOR KEY	 SLEDGE HAMMER

USA OFFICE
300 Forge Way, Suite 2
Rockaway, New Jersey, 07866
T +1 973 627 4646 F +1 973 627 4622

EUROPEAN OFFICE
Meer en Duin 82
2163 HC Lisse, the Netherlands
T +31 (0)252 419002 F +31 (0)252 411794

RESQTEC®
In partnership with
Power Hawk Technologies, Inc.
WWW.RESQTEC.COM

Copyright All of the information and material inclusive of text, images, logos, product names is either the property of, or used with permission by Resqtec. The information may not be distributed, modified, displayer, reproduced – in whole or in part – without the prior written permission by Resqtec.
Trademarks Resqtec, its logos and other Resqtec products and services referenced herein are trademarks of Resqtec, and may be registered in certain jurisdictions. All other product names, company names, marks and logos referenced may be trademarks of their respective owners. Hurst and Jaws of Life are the registered trademarks of Hurst Jaws of Life, Inc.
Disclaimer All information herein was carefully gathered and examined. However, we cannot be held responsible for eventual mistakes or incompleteness. Resqtec may exercise the right to change or modify parts at any time without notification. The content may be subject to error, revision and technical modifications. Resqtec accepts no liability for the consequences of activities undertaken based on the contents.



PROFIX MAX
POWERFUL AND MODULAR STRUT

RESQTEC®
In partnership with
Power Hawk Technologies, Inc.
WWW.RESQTEC.COM